


light

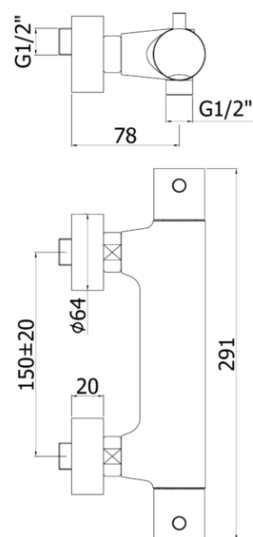

DESCRIZIONE | DESCRIPTION

- Miscelatore termostatico doccia completo di:
- set 2 eccentrici 1/2"x3/4"G e rosoni
- Thermostatic shower mixer complete with:
- set of 2 S-wall-unions 1/2"x3/4"G and wall-plates

ARTICOLO | ARTICLE

LIQ 168..

- senza set doccia
- con attacco inferiore 1/2"G
- without shower set
- with 1/2"G lower connection

LIQ 168D..

- con supporto a muro snodato in metallo
- con doccia e flessibile
- with metal joint wall bracket
- with hand-shower and flexible hose

FINITURE | FINISHES

LIQ 168

CR- Cromo | Chrome

LIQ 168D

CR- Cromo | Chrome

RAPPORTO PROVA PORTATA | FLOW RATE REPORT

	Uscita outlet	Pressione / Pressure (bar)									
		0,5	1	1.5	2	2.5	3	3.5	4	4.5	5
Portata / Flow rate (l / min)		9.94	14.29	17.53	20.25	22.71	24.78	26.94	28.62	30.51	32.1

DOCUMENTI TECNICI | TECHNICAL DOCUMENTS

DIAGRAMMA
PORTATA 1ISTRUZIONI
INSTALLAZIONEESPLOSO
RICAMBI
LIQ 168ESPLOSO
RICAMBI
LIQ 168D